

CUSTOM CUT V-GROOVE




PRODUCT DATA SHEET



PROFILES:

- Available in either a 4" or 6" reveal
- Can be installed vertically, horizontally, diagonally or as soffit.
- Comes cut to any desired length from 4'-24' in 0.25" increments
- Available in smooth or perforated (soffit)

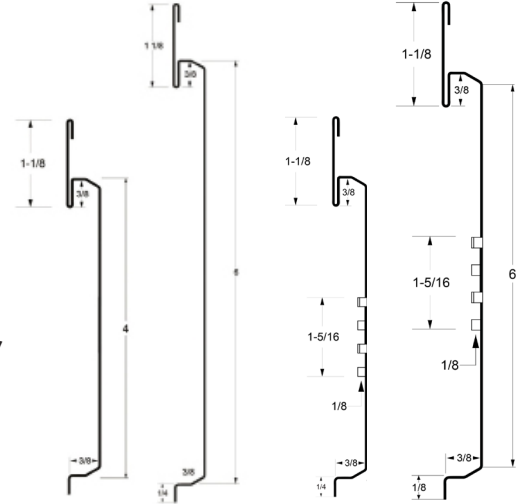

ATTRIBUTES:

- 24ga Galvalume Steel, with KYNAR 500 paint
- Average 5 - 10 business days for Manufacturing
- Available with wide array of trims both in 1pc or 2pc
- Available in a wide array of colours
- Total weight per SQFT: 4" = 1.625 lbs, 6" = 1.42 lbs
- Installed 24" O.C. on girts, furring, or directly to sheathing
- No minimum order per size or order
- 100% Recyclable - from 25% recycled material

TESTING:



Class A fire rated / Non - Combustible
ASTM E84 / CAN/ULC S102-10
ASTM E 136 / CAN/ULC S114-05

Wind tested ASTM E330

